ISOCELL

ISOBLOW

ISOblow TiTAN TwinTurbo

ISOblow TiTAN TwinTurbo is equipped with 2 turbines with varying characteristics – a real powerhouse for professional installers! The airlock has been enlarged by 50 %, permitting even higher flow. Due to the exactly balanced 5.5 kW air power, air volume flow values over 720 m³ / h and 450 mbar with 16A fuse protection are possible. This is unique on the market! The ultimate powerblowingmachine for cellulose and wood-fibre insulation materials.ontrolled via radio remote controls.

ISOCELL RADIO REMOTE CONTROL:

Control Air / Control material slide

The advantages are obvious

two turbines produce very powerful airflow

highly suitable for woodfibre insulation

easy loading via large filling hatch

extension with large capacity

hopper with five loosening shafts

optimal loosening – even of firmly pressed bales

ideal for large construction sites and for use in prefabrication

1 x 400 V 16A connection is sufficient

ISOCELL GmbH & Co KG
Gewerbestraße 9 | 5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108 | office@isocell.at

ISOCELL

ISOBLOW

ISOblow TiTAN TwinTurbo



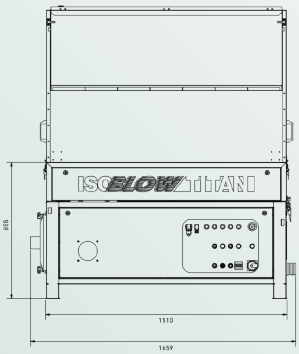

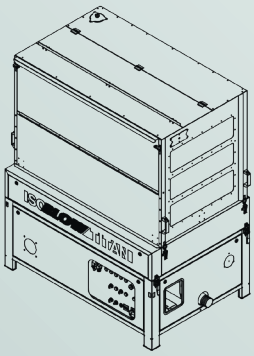



TECHNICAL DATA

	1680 x 1010 x 1840 mm (AxBxC)
	570 kg
	1503 l
	1,1 kW
	1,1 kW
	- - -
	0,55 kW
	7,5 kW
	- - -
Σ	10,25 kW
	600 mbar
	720 m³/h
	400 V / 50 Hz, 16 A
	3“ (76 mm)
	Control Air / Control material slide



11_2022

ISOCELL GmbH & Co KG
Gewerbestraße 9 | 5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108 | office@isocell.at

ISOCELL.COM